


# ZEFIRO

design office



### MELAMINE CARCASS

Bottom, top, sides, dividers, and shelves made from 18mm easy to clean scratch-resistant anti-reflective melamine faced chipboard (MFC) finished with 1mm matching ABS impact resistant edging; 8mm back panels made in the same MFC. Panel density: 670/730 kgs per cubic meter.

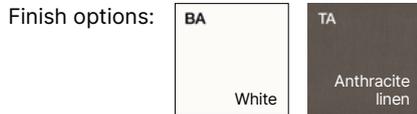

### LACQUERED MELAMINE CARCASS

Bottom, top, sides, dividers, and shelves made from 18mm matt lacquered melamine faced chipboard (MFC) finished with 1mm lacquered ABS impact resistant edging; 8mm back panels made in the same lacquered MFC. Panel density: 670/730 kgs per cubic meter.



Production lead time: 5 weeks excluding delivery time. Apart from the shown finish options any RAL color can be made to order.

### DOORS

Hinged doors are not available as standard, yet it is possible to fit **non-locking doors** on request.

- **Melamine non-locking hinged doors:** Made from 18mm easy to clean scratch-resistant anti-reflective melamine faced chipboard (MFC) finished with 1.5mm matching ABS impact resistant edge. Panel density: 670/730 kgs per cubic meter. Height/width/depth adjustable anti-corrosion treated metal hinges allowing 105° door opening.
- **Lacquered melamine non-locking hinged doors:** Made from 18mm easy to clean scratch-resistant anti-reflective melamine faced chipboard (MFC) finished with 1.5mm matching ABS impact resistant edges. The surface is coated using matt lacquers in a variety of colors. Panel density: 670/730 kgs per cubic meter. Height/width/depth adjustable anti-corrosion treated metal hinges allowing 105° door opening.
- **Wood veneer non-locking hinged doors:** Made from 19mm veneered particle board, 0.6mm wood veneer on both surfaces, finished with 1mm veneer edging, 0.5mm radiused corners. Matt transparent semi-open pore varnish. Panel density: 720/790 kgs per cubic meter. Height/width/depth adjustable anti-corrosion treated metal hinges allowing 105° door opening.
- **Leather non-locking hinged doors:** 18mm melamine faced chipboard (MFC) finished with matching straight melamine edges. Panel density: 670/730 kgs per cubic meter. The door is covered with 1.3mm abrasion resistant leather finished with matching decorative stitching along the perimeter of the panel. Height/width/depth adjustable anti-corrosion treated metal hinges allowing 105° door opening.
- **Framed glass non-locking hinged doors:** 4mm tempered translucent white glass framed hinged doors, 20×19.2mm extruded aluminium frame. Height/width/depth adjustable anti-corrosion treated metal hinges allowing 105° door opening.
- **Unframed glass non-locking hinged doors:** 4mm tempered translucent smoked glass frameless hinged doors, polished edges and radiused corners. Height/width/depth adjustable anti-corrosion treated metal hinges allowing 105° door opening.

**DOOR FINISH OPTIONS**

Melamine:



Lacquered:



Production lead time: 5 weeks excluding delivery time. Apart from the shown finish options any RAL color can be made to order.

Wood veneer:



Leather:



Production lead time: 5 weeks excluding delivery time.

Framed glass hinged doors:



Frameless glass hinged doors:



**LEGS**



**STANDARD LEGS**

Five ø50mm 27mm high polyethylene feet, 0-15mm adjustable ø25mm levellers.



**ROUND**

ø50mm 150mm high ABS leg supplied with 0-10mm adjustable ø52mm levellers.



**SMART**

20x60mm 150mm high metal leg supplied with 0-15mm adjustable ø25mm levellers.



**CLASSY & CLASSY+**

Aluminium 146mm high organic legs, supplied with 0-10mm adjustable ø18mm levellers. Also available with external decorative profile.



**FAIRY & FAIRY+**


Aluminium 146mm high organic legs with middle decorative cavity, supplied with 0-10mm adjustable ø18mm levellers. Also available with external decorative profile.




860MM HIGH ZEFIRO BOOKSHELF




**AVAILABLE HEIGHTS (CLADDING TOP EXCLUDED)**

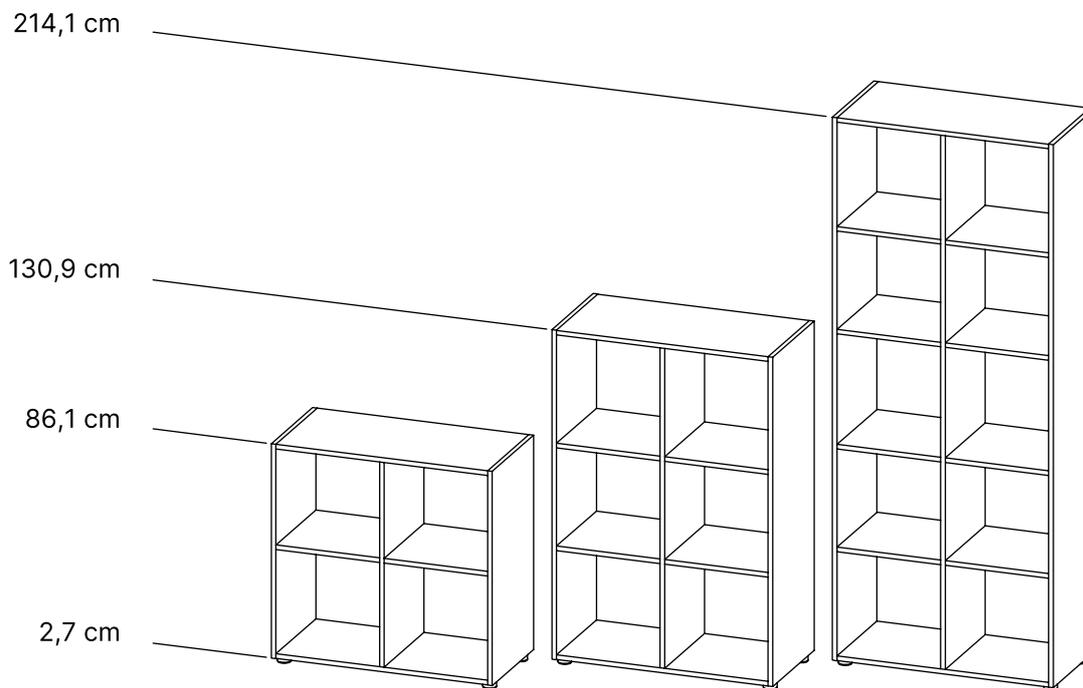


**18/30MM THICK CLADDING TOP PANELS**

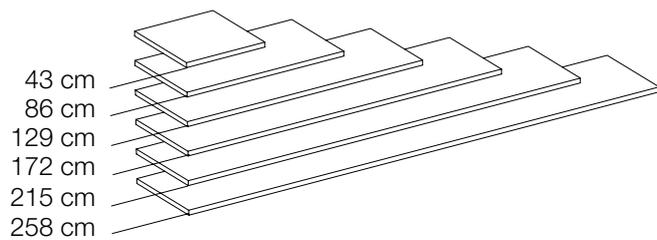

**18/30MM THICK CLADDING SIDE PANELS**

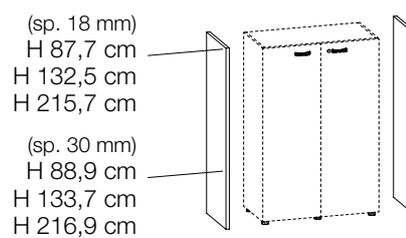



**18MM THICK CLADDING TOP AND CLADDING SIDE PANELS**

Melamine:



Lacquered:



Production lead time: 5 weeks excluding delivery time. Apart from the shown finish options any RAL color can be made to order.

**30MM THICK CLADDING TOP AND CLADDING SIDE PANELS**


Melamine:



Wood veneer:



Leather:

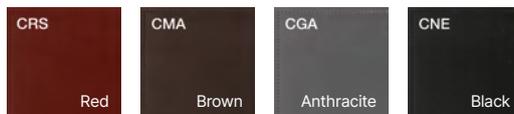

Production lead time: 5 weeks excluding delivery time.



**MATERIALS AND RECYCLABILITY**

MFC panels used for Zefiro range tables are solely manufactured with 100% recycled wood and fully meet requisites of formaldehyde low emissions (CARB Quality Award CATAS Certificate). Rasins used for panels and melamines are free of SVHC substances (to be found in the ECHA list updated as of 12/01/2017).



**CERTIFICATES**

Constantly receptive to market requirements, Quadrifoglio Sistemi d'Arredo pay special attention on quality and safety contents in order to provide high products and services. The Company has reached certifications UNI EN ISO 9001/2015, UNI EN ISO 14001/2015 and UNI EN ISO 45001/2018 to confirm his policy. Our products are certified and ensured by FSC™ and ECOLOGICAL PANEL.

COMPANY WITH  
MANAGEMENT SYSTEM  
CERTIFIED BY DNV  
ISO 9001 • ISO 14001  
ISO 45001



**GREEN ENERGY**

The Company had installed the photovoltaic system with 4.500 solar panels in a 7.350 m<sup>2</sup> surface that covers almost entirely the factory. The photovoltaic is able to produce 1Mw of a quiet green energy, that does not harm the environment and is waste-free. With his high production capacity the photovoltaic allows us to reduce emissions in the atmosphere of all those polluting substances and to those that contribute to the greenhouse effects. Consequently, such measures make us save every year 180 tonne of petrol oil, 440 tonne of CO<sub>2</sub>, 514kg of sulphur dioxide, 448 kg of nitrogen oxide and 23kg of dust.



**TRANSPORT**

Detachable systems. Volumes that facilitate the optimization of space. Maximum reduction of energy consumption by transport.