

NOVA desks



FEATURES

- Easy to assemble and disassemble - "metal to metal" construction
- Just one tool for assembling (DIN911 S5)

QUALITY STANDARD

- LST EN 527-1:2011
- LST EN 527-2:2017
- LST EN 1730:2012

TECHNICAL INFORMATION

Desktop

- 25 mm MFC (melamine) with 2 mm ABS edging;
- 10 mm gap between the legs and the desktop;
- 40 mm gap between the desktops in back to back benches (depth of benches – 1440/1640).


Metal beam

- Metal tube - 40x20 mm;
- With welded metal plates for leg fixing;
- Powder coated metal, colour matches the legs.


Legs

- Welded metal tube - 40x40 mm;
- Powder coated metal;
- Plastic feet with height levelling (+10 mm).

Leg type

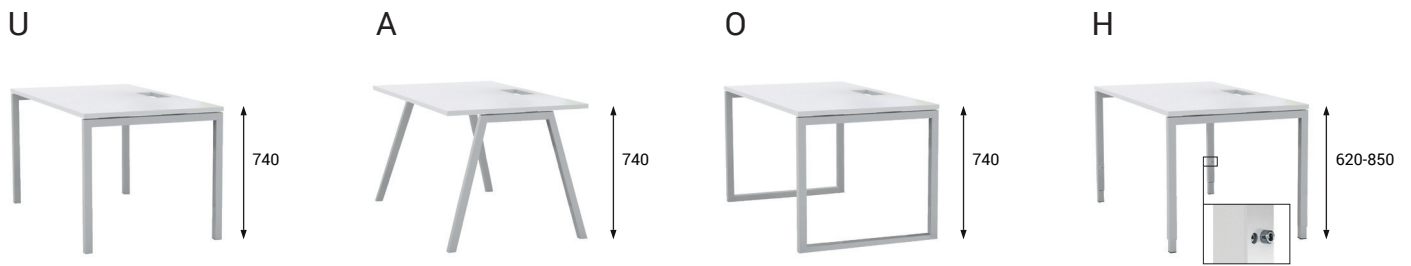


Desktop type

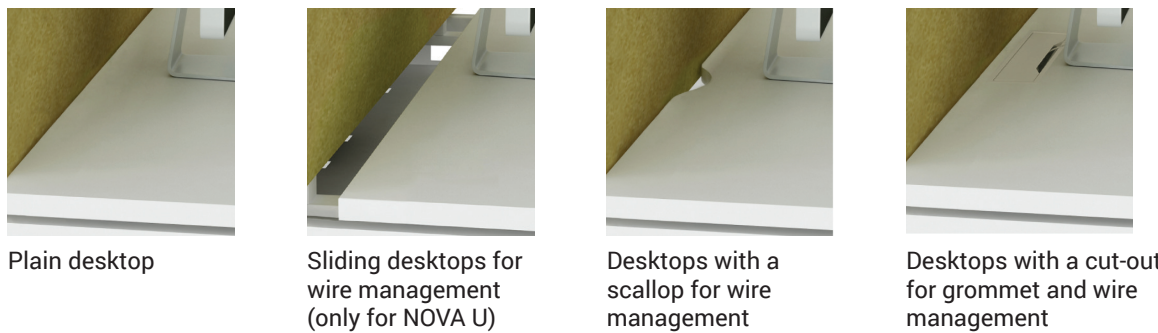


RANGE


NOVA U, A, O single desks

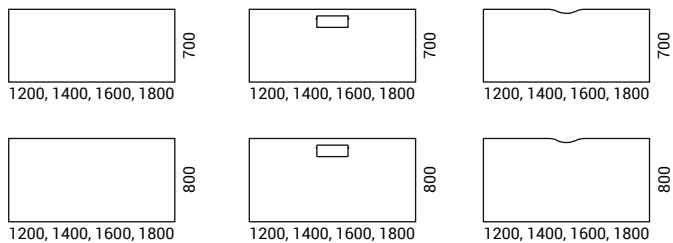


NOVA H single desks



NOVA U Slide single desks




NOVA U, A, O single row benches

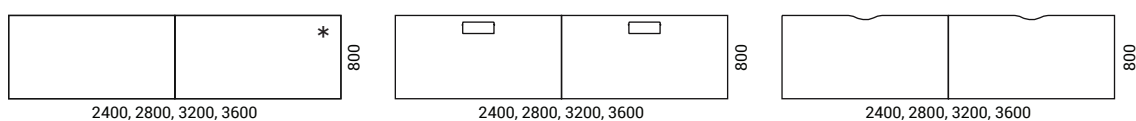


* NOVA U only


NOVA U, A, O 2-desk benches

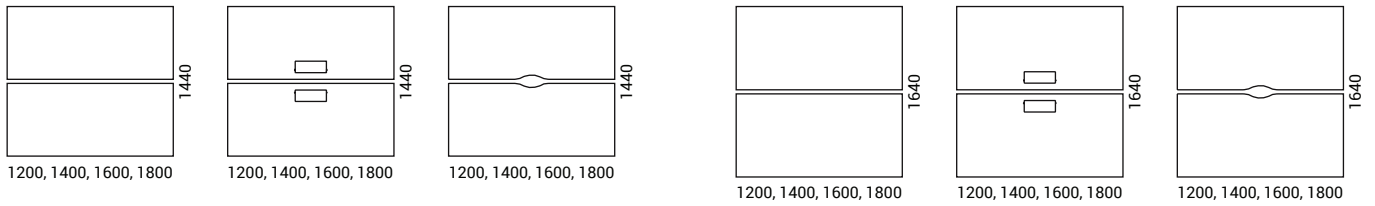


NOVA U Slide 2-desk benches

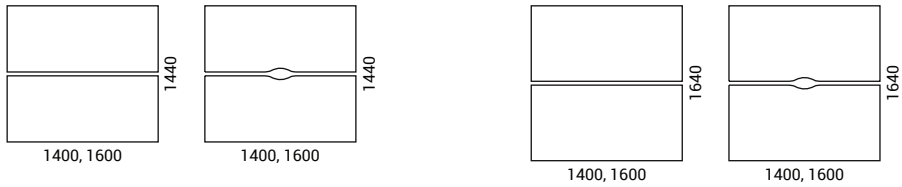


NOVA U, A, O 4-desk benches

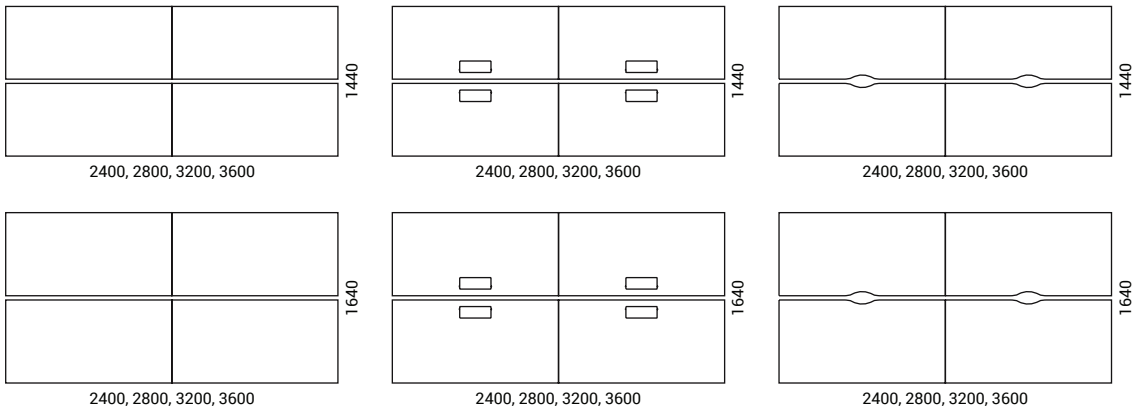


NOVA U Slide 4-desk benches

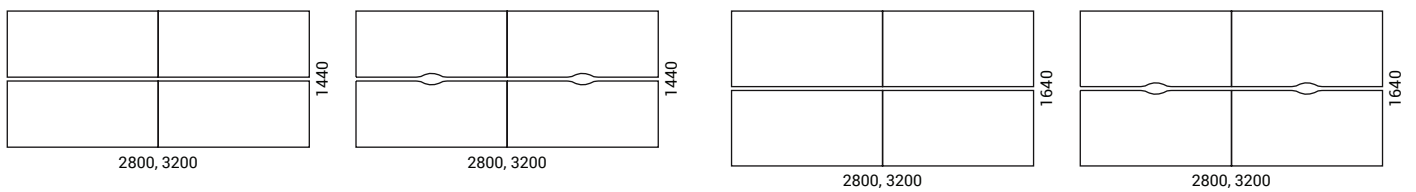

NOVA U, A, O Crescent desks

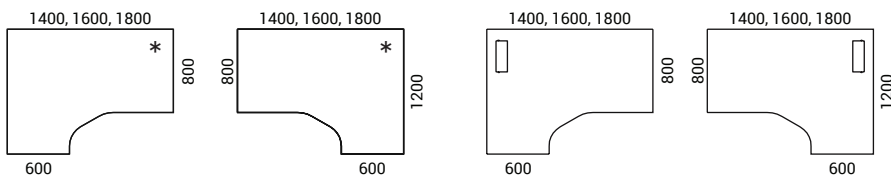

NOVA U 3-desk bench



* NOVA U only

Must be ordered
(for desktop with cut-out)



Metal grommet:
317x119 mm,
H=27 mm

Optional




Power socket
blocks



Cable trays



Cable clips



Cable ducts