


SNOWSOUND DIVISION

LIGHTING ELEMENT TECHNICAL CARD

NOT DIMMABLE

Description: Fixture for diffused light complete with a high efficiency LED module (25W power) with nominal flux 3610 lm (3000 K). It is made from epoxy polyester powder coated aluminium and equipped with a polished polyethylene diffuser, which provides discreet and effective light without glare. Driver and electrical three-wire electrical cable 3x0,75 mm² lenght 390 cm included. The degree of protection against the penetration of dust, solid objects and liquids is IP40.

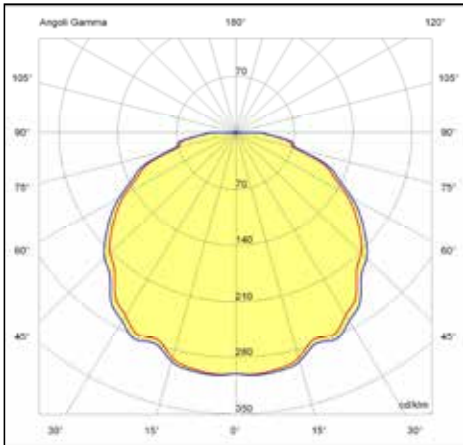

Luminaire details

Supply voltage	220-240V 50-60Hz
Driver 1050mA	included
Insulation class	CL I
IP number	IP40
Glow wire	650° C
Impact test	IK07
European standards	EN60598-2-1
	EN62471:2008, EN60825-1
Photobiological risk	RG0


Lamp details

Lamp	LED
Type	circular module
CRI	>80
CCT	3000 K
SDCM	3
Luminous flux @65°C	3610lm
Power supply	1050mA-24V
IEE	A++



DIMMABLE

Description: Fixture for diffused light complete with a high efficiency LED module (25W power) with nominal flux 3610 lm (3000 K). It is made from epoxy polyester powder coated aluminium and equipped with a polished polyethylene diffuser, which provides discreet and effective light without glare. Dimmable driver and electrical five-wire electrical cable 5x0,75 mm² lenght 390 cm included. The degree of protection against the penetration of dust, solid objects and liquids is IP40.

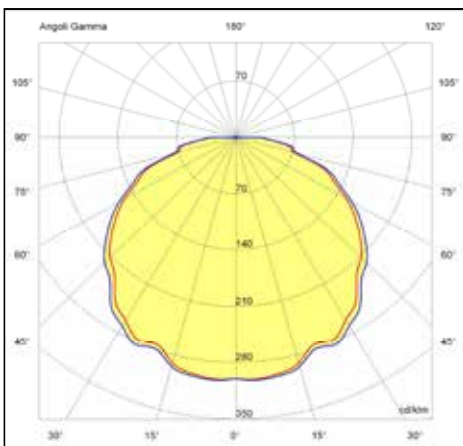

Luminaire details

Supply voltage	220-240V 50-60Hz
Driver 1050mA	included
Insulation class	CL I
IP number	IP40
Glow wire	650° C
Impact test	IK07
European standards	EN60598-2-1
	EN62471:2008, EN60825-1
Photobiological risk	RG0

Lamp details

Lamp	LED
Type	circular module
CRI	>80
CCT	3000 K
SDCM	3
Luminous flux @65°C	3610lm
Power supply	1050mA-24V
IEE	A++