

SPECIFICATION

Range: **GIOTTO**
Design: **Sezgin Aksu**

“Snowsound Technology” sound-absorbing element fixed to the wall.

Panel description:

Both faces with convex section 36 mm thick, consisting of an internal padding in variable density polyester fiber. The density decreases moving towards the heart of the panel, which is covered on both sides with Trevira CS® polyester fabric, solidly applied to the padding. The panel is double sided, with same characteristics on both sides. It is characterized by the rigid edge obtained by the manufacturing process itself, without any supporting and/or stiffening frame.


The panel has **Euroclass B-s2, d0** fire reaction.

The panel is **Greenguard Gold** certified, which validates its low VOC emission and its contribution to the quality of the indoor environment.

The panel is **100% recyclable** and has no detectable formaldehyde content according to UNI EN 717-2. It does not contain felts or other organic materials that are hardly recyclable.

The panel has been tested in reverberation chamber according to UNI EN ISO 354 and obtained “**Acoustic Absorption Class A**”, in accordance with UNI EN ISO 11654.

Panel dimensions:

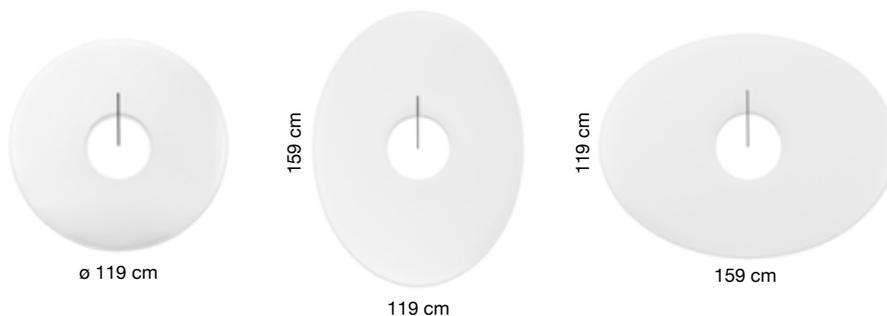

Support description:

Wall attachment, made of chromed or epoxy powder coated steel sheet (5 mm thick). It consists of a support welded to a plate with 4 holes \varnothing 8 mm for wall mounting (using dedicated screws). These two elements create the space the panel is placed.



Available colors:

0001



White

8004



Silver grey

1008



Beige

4030



Carrot orange

