


Description: Fixture complete with a high efficiency LED light source with a nominal flux of 2x2500 lm (3000 K). It is made from anodized aluminium. Driver 60W/24V, electric cable length 300 cm and striped 280 led/mt with opal polycarbonate diffuser are included. The degree of protection against the penetration of dust, solid objects and liquids is IP40.

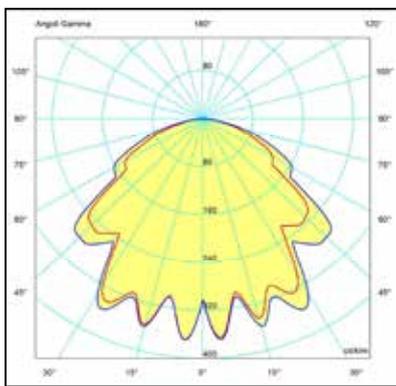

Luminaire details

Supply voltage	24V
Driver 24Vdc (110-240V)	included
Insulation class	CL I
IP number	IP40
Glow wire	850° C
Impact test	IK04
European standards	EN60598-2-1
	EN62471:2008, EN60825-1
Photobiological risk	RG0

Lamp details

Lamp	LED
Type	Strip 280-3000
CRI	>90
CCT	3000 K
Luminous flux @65°C	2X2500lm
Power supply	24V
Power	2X25W
IEE	A+

