

# JAZZ meeting tables

Design by Christina Strand and Niels Hvass | Denmark



## QUALITY STANDARD

- LST EN 14073-2:2004
- LST EN 527-1:2011
- LST EN 527-2:2003

## TECHNICAL INFORMATION

### Desktop

- 25 mm MFC (melamine) with 2 mm ABS edging;
- 26 mm MDF covered in laminate with sloping painted edges;
- Sloping desktop: edges painted in white or black colour;
- With or without a power socket.



Plain edge  
(melamine)



Sloping edge  
(laminate)



Height adjustment button  
integrated in the desktop



Power socket integrated  
into desktop

### Power sockets (included)

- By OE ELECTRICS (EU, UK, FR, CH). Tables with concrete base only EU, UK, FR!
- 1/2 sockets for 230V/110V

## MEETING TABLES



### Feet

- Feet made of 12 mm thick steel sheet, colour matches the leg;
- Dimensions: 70x800x30 mm;
- Leg base has height levelling feet;
- Levelling feet covers made of black lacquered MDF.

### Metal frame

- Metal "L" profile: 50x50 mm;
- Powder coated metal, colour matches the leg.

### Leg column

- Dimensions: 50x80x686 mm;
- Powder coated metal, black or white colour.

### Cable tray (included)

- Tray hides electric installation and power sockets;
- Dimensions: 920/1120x190x52 mm;
- No tools required to open;
- Available in white and black colours.

## HEIGHT ADJUSTABLE MEETING TABLES WITH CONCRETE BASE



### Concrete base

- Dimensions: 600x600x45 mm;
- Grey colour by default (natural concrete);
- Water resistant / impregnated;
- Weight: 29 kg.

### Electronic data power unit

- Input: 110-240 V;
- Frequency: 50/60 Hz;
- Output: 18 V;
- Power Plug: 2-pol;
- Energy use standby: 0,01 W;
- Operating Cycle: 1 minute on, 9 minutes off.

### Metal frame

- Metal profile: 50x50 mm;
- Powder coated metal; colour matches the lifting column.

### LINAK DL5 lifting column

- Two motors and telescopic frame;
- Soft start and soft stop;
- Velocity speed: up to 38 mm/sec;
- Stroke length: 500 mm;
- Lifting capacity: 80 kg;
- Black or white colour.

### Cable tray (included)


- The tray hides electric leg's cable installation;
- No tools required to open;
- Powder coated; white or black (colour matches the lifting column).

### Spiral electric cable

- 230 V, 1.5 m length cable;
- EU, UK, FR standards;
- Included;
- White or black (colour matches the lifting column);
- Fixed with metal holders to the top and bottom; holders colour matches the cable.

## RANGE

### MEETING TABLES

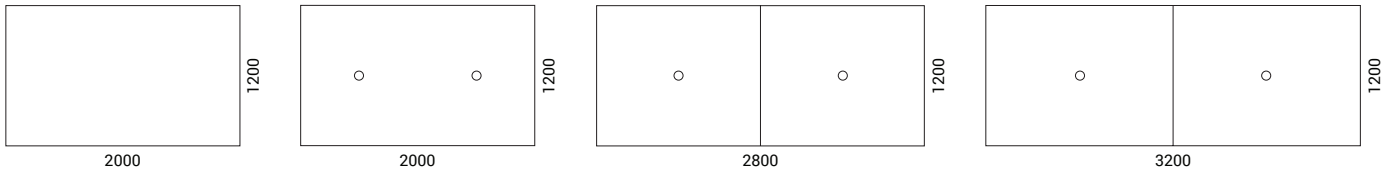

### HEIGHT ADJUSTABLE MEETING TABLES WITH CONCRETE BASE

